




HS


half-shell

focusTM40



Frequency (Hz)

Focus HS fitting range.

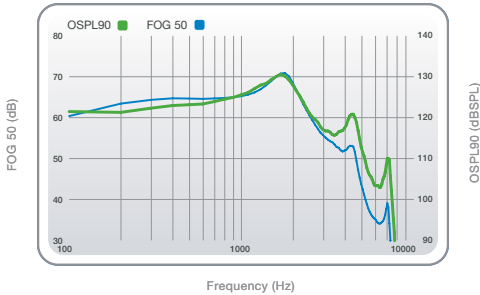

OSPL90 (green) and Full-On Gain (blue) curves for the Focus HS at the highest matrix of 130/70.

Matrices: Up to 130/70

Maximum Output: Up to 30dB Reduction in 2dB Steps (range varies by channel)

Compression Threshold: 24dB Range in 4dB Steps

Compression Ratio: 1:1-3:1 (range varies by channel)

Battery Sizes: 10, 312, 13

ANSI/IEC data

HS

Measurement	ANSI/IEC 2cc Coupler	IEC OES Coupler
Peak OSPL90 (dB SPL)	110-130	119-139
HFA OSPL90 (dB SPL)	106-126	NA
RTF OSPL90 (dB SPL)	NA	114-138
Peak Gain (dB)	40-70	50-79
HFA Full-On Gain (dB)	36-65	NA
RTF Full-On Gain (dB)	NA	43-78
Frequency Range (Hz)	100 - 7000	NA
Reference Test Frequency (kHz)	NA	1.6
HFA Frequencies (kHz)	1.0, 1.6, 2.5	NA
Reference Test Gain (dB)	29-49	36-63
Harmonic Distortion		
500 Hz (%)	<3	<3
800 Hz (%)	<3	<3
1600 Hz (%)	<3	<3
Attack and Release Time (ANSI/IEC) – Test Mode		
Attack Time (ms)	20	20
Release Time 0.1s (ms)	5-150	5-250
Release Time 2.0s (ms)	5-150	5-250
Induction Coil Sensitivity		
HFA SPLITS (ANSI) (dB SPL)	89-109	NA
MASL (IEC) (dB SPL)	NA	73-108
ANSI/IEC Battery Current (mA)	1.1-1.7	1.1-1.7
Idle Current (mA)	1.0-1.3	1.0-1.3
Estimated Battery Life for 16-Hour Day		
13 Zinc Air (days)	13-17	13-17
312 Zinc Air (days)	7-10	7-10
10 Zinc Air (days)	5-7	5-7